

# The Low Risk Site Handbook for Erosion Prevention and Sediment Control



August 2006



# **The Low Risk Site Handbook for Erosion Prevention and Sediment Control**

Any construction activity that disturbs 1 or more acres of land, or is part of a larger development plan that will disturb 1 or more acres, requires a Vermont state permit for stormwater discharges from construction sites.

Construction General Permit 3-9020 guides an applicant in the determination of the potential risk to water quality from the construction activity and categorizes the applicant's activity as Low Risk, Moderate Risk, or that which requires an Individual Permit.

The standards in this handbook serve as the required Erosion Prevention and Sediment Control Plan for construction sites determined to be "Low Risk" under GP-3-9020.

## **Contact Information**

VT DEC - Water Quality Division  
Stormwater Section  
103 South Main Street, Building 10 North  
Waterbury, VT 05671-0408  
Tel: 802-241-3770 or 4320  
[www.vtwaterquality.org/stormwater.htm](http://www.vtwaterquality.org/stormwater.htm)

# Table of Contents

## Section 1: Introduction

What is erosion prevention and sediment control? . . . . .	1
Do I need a permit? . . . . .	2
Application Process . . . . .	2

## Section 2: The Requirements

1. Mark Site Boundaries. . . . .	3
2. Limit Disturbance Area. . . . .	5
3. Stabilize Construction Exit . . . . .	7
4. Install Silt Fence . . . . .	11
5. Divert Upland Runoff . . . . .	15
6. Slow Down Channelized Runoff. . . . .	19
7. Construct Permanent Controls . . . . .	23
8. Stabilize Exposed Soil . . . . .	25
9. Winter Stabilization . . . . .	29
10. Stabilize Soil at Final Grade. . . . .	33
11. Dewatering Activities . . . . .	35
12. Inspect Your Site. . . . .	37

## Section 3: Additional Resources

How to calculate slope. . . . .	39
How to estimate area. . . . .	39


## Section 1 Introduction

### What is erosion prevention and sediment control?

Sediment washing into streams is one of the largest water quality problems in Vermont. Sediment can kill or weaken fish and other organisms and adversely impact aquatic habitat.

On most construction sites, vegetation that holds the soil in place and protects it from erosive forces of rain and runoff is removed, leaving large areas of soil exposed to the elements. During rainfall or snowmelt, the exposed soil may be easily eroded and transported to nearby streams, lakes, or wetlands.

To prevent this from happening, a small number of simple practices to prevent erosion and contain soil on the construction site must be used.

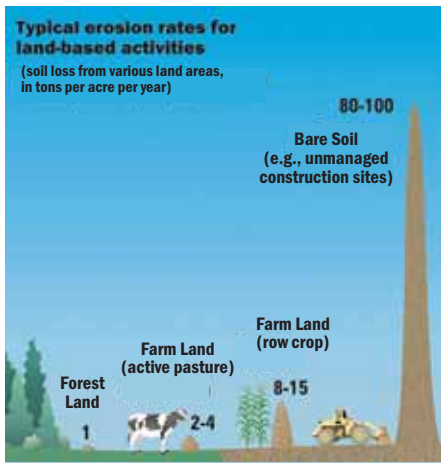

## Do I need a permit?

Any construction activity that disturbs 1 or more acres of land, or is part of a larger development plan that will disturb 1 or more acres, requires a Vermont state permit for stormwater discharges from construction sites.

## Application Process

1. Obtain a copy of the permit and determine the Risk Category of the proposed project. The permit is available online at:  
[www.vtwaterquality.org/stormwater.htm](http://www.vtwaterquality.org/stormwater.htm).
2. Submit the Notice of Intent (NOI) form, notifying the Department of your intent to begin construction.  
*\*Submit the NOI to DEC at least 60 days before you plan to begin construction to allow sufficient time for processing.*
3. Upon receipt of written authorization from DEC, you are covered under the permit and may begin construction.
4. If your project is determined to be “Low Risk”, you must follow this handbook for erosion prevention and sediment control on your construction site.
5. If your site is not classified as Low Risk, then you must follow the Department guidance in GP 3-9020 for Moderate Risk activities or those requiring an Individual Permit.

## Section 2

# The Requirements


### 1. Mark Site Boundaries

#### Purpose:

Mark the site boundaries to identify the limits of construction. Delineating your site will help to limit the area of disturbance, preserve existing vegetation and limit erosion potential on the site.

#### Requirements:

You must physically mark the limits of construction.

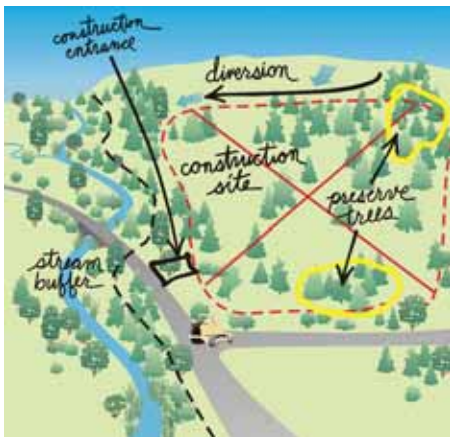

## How to comply:

Before beginning construction, walk the site boundaries and flag trees, post signs, or install orange safety fence.

Fence is required on any boundary within 50 feet of a stream, lake, pond or wetland, unless the area is already developed (existing roads, buildings, etc.)



*Properly placed barrier tape marks the boundaries and limits of construction on this site.*

## **2. Limit Disturbance Area**

### **Purpose:**

Limit the amount of soil exposed at one time to reduce the potential erosion on site.

### **Requirements:**

The permitted disturbance area is specified on the site's written authorization to discharge. Only the acreage listed on the authorization form may be exposed at any given time.



## How to comply:

Plan ahead and phase the construction activities to ensure that no more than the permitted acreage is disturbed at one time.

Be sure to properly stabilize exposed soil with seed and mulch or erosion control matting before beginning work in a new section of the site.



*This residential subdivision is being constructed in phases. To limit the total disturbance area, only a few home sites are under construction at one time.*

### 3. Stabilize Construction Entrance

#### Purpose:

A stabilized construction entrance helps remove mud from vehicle wheels to prevent tracking onto streets.

#### Requirements:

If there will be any vehicle traffic off of the construction site, you must install a stabilized construction entrance before construction begins.



*Construction entrance detail. Entrance/exit pad must keep mud from tracking onto both paved and dirt roads.*

## How to install:

**Rock Size:** Use a mix of 1 to 4 inch stone

**Depth:** 8 inches minimum

**Width:** 12 feet minimum

**Length:** 40 feet minimum (or length of driveway, if shorter)

**Geotextile:** Place filter cloth under entire gravel bed

## Maintenance:

Redress with clean stone as required to keep sediment from tracking onto the street.



*Good stabilized construction entrance. Adequate width to accommodate construction traffic and prevent mud tracking onto neighboring streets. Ensure that the pad is 8 inches deep and 40 feet long.*

*Stabilize Construction Entrance*



*Poor construction exit. Rock pad is poorly constructed; rock is too small. Use filter fabric under 1 - 4 inch rock. No mud should be tracked onto roads.*



*Rock sizing and placement look OK for residential site, and very little mud appears on the road. The pad should be at least 8 inches thick and 12 feet wide. Ensure that pad is used as the entrance and exit points - note track marks near curb. Entire area needs seed and mulch.*



*Rock pad was installed properly with right sized rock, but lack of filter fabric underliner is causing rock to spread and sink into the soil. Note tracking of mud onto road. Mud tracked on roadways violates the permit requirements and is a potential legal liability.*

## 4. Install Silt Fence

### Purpose:


Silt fences intercept runoff and allow suspended sediment to settle out.

### Requirements:

Silt fence must be installed:

- on the downhill side of the construction activities
- between any ditch, swale, storm sewer inlet, or waters of the State and the disturbed soil

\* *Hay bales must not be used as sediment barriers due to their tendency to degrade and fall apart.*

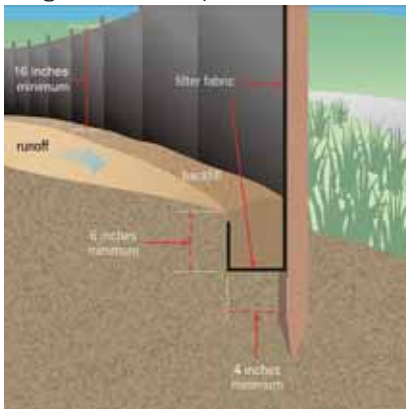

*Remember: stakes go on the downhill side. Dig trench first, install fence in downhill side of trench, tuck fabric into trench, then backfill on the uphill side (the side toward the bare soil area).*

## Where to place:

- Place silt fence on the downhill edge of bare soil. At the bottom of slopes, place fence 10 feet downhill from the end of the slope (if space is available).
- Ensure the silt fence catches all runoff from bare soil.
- Maximum drainage area is  $\frac{1}{4}$  acre for 100 feet of silt fence.
- Install silt fence across the slope (not up and down hills!)
- Install multiple rows of silt fence on long hills to break up flow.
- Do not install silt fence across ditches, channels, or streams or in stream buffers.

## How to install silt fence:

- Dig a trench 6 inches deep across the slope
- Unroll silt fence along the trench
- Ensure stakes are on the downhill side of the fence
- Join fencing by rolling the end stakes together
- Drive stakes in against downhill side of trench
- Drive stakes until 16 inches of fabric is in trench
- Push fabric into trench; spread along bottom
- Fill trench with soil and pack down

## Maintenance:

- Remove accumulated sediment before it is halfway up the fence.
- Ensure that silt fence is trenched in ground and there are no gaps.



*Very good use of continuous “super” (reinforced) silt fence. Note that wire fencing is installed between the filter fabric and the posts.*



*Good use of J-hook in silt fence to trap sediment in water running along the fence. Sediment must be removed before it reaches halfway to top of fence.*







*Very good installation of multiple silt fences on long slope. Turn ends of fencing uphill to prevent bypass. Leave silt fences up until grass is well established on all areas of the slope. Re-seed bare areas as soon as possible. Remove or spread accumulated sediment and remove silt fence after all grass is up.*



*Poor installation of silt fencing. Silt fence must be trenched in along bottom. Hay bales are not approved as sediment barriers.*

## 5. Divert Upland Runoff

### Purpose:

Diversion berms intercept runoff from above the construction site and direct it around the disturbed area. This prevents “clean” water from becoming muddied with soil from the construction site.

### Requirements:


If stormwater runs onto your site from upslope areas and your site meets the following two conditions, you must install a diversion berm before disturbing any soil.

1. You plan to have one or more acres of soil exposed at any one time (excluding roads).
2. Average slope of the disturbed area is 20% or steeper.\*

*Berms and ditches divert clean upland runoff around construction sites and reduce erosion and sedimentation problems. Stabilize berms and ditches after construction.*



## How to install:

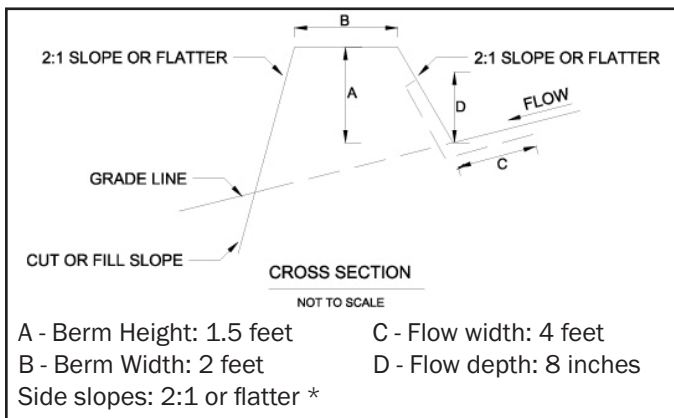

1. Compact the berm with a shovel or earth-moving equipment.
2. Seed and mulch berm or cover with erosion control matting immediately after installation.
3. Stabilize the flow channel with seed and straw mulch or erosion control matting. Line the channel with 4 inch stone if the channel slope is greater than 20%\*.
4. Ensure the berm drains to an outlet stabilized with riprap. Ensure that there is no erosion at the outlet.
5. The diversion berm shall remain in place until the disturbed areas are completely stabilized.

\* See page 39 for slope calculations.



*Good construction, seeding, and stabilization of diversion berm. Note that diversion ditch is lined with grass on flatter part of slope, and with rock on steeper part.*



*Well built vegetated berm diverting runoff. Diversion berms and ditches should be seeded after construction. Use matting if slopes are steep.*



*Good installation of rock-lined berm to divert rain runoff around residential construction site on steep slope near a river. Diversion ditches can be lined with grass if channel slopes are 5% or less, and with 4 inch stone if they are steeper.*

## 6. Slow Down Channelized Runoff

### Purpose:

Stone check dams reduce erosion in drainage channels by slowing down the stormwater flow.

### Requirements:

If there is a concentrated flow (e.g. in a ditch or channel) of stormwater on your site, then you must install stone check dams. Hay bales must not be used as check dams.

### How to install:

**Height:** No greater than 2 feet. Center of dam should be 9 inches lower than the side elevation

**Side slopes:** 2:1 or flatter (see p.39 for slope calculation)

**Stone size:** Use a mixture of 2 to 9 inch stone

**Width:** Dams should span the width of the channel and extend up the sides of the banks

**Spacing:** Space the dams so that the bottom (toe) of the upstream dam is at the elevation of the top (crest) of the downstream dam. This spacing is equal to the height of the check dam divided by the channel slope.


Spacing (in feet) =  $\frac{\text{Height of check dam (in feet)}}{\text{Slope in channel (ft/ft)}}$


### Maintenance:

Remove sediment accumulated behind the dam

as needed to allow channel to drain through the stone check dam and prevent large flows from carrying sediment over the dam.

If significant erosion occurs between check dams, a liner of stone should be installed.

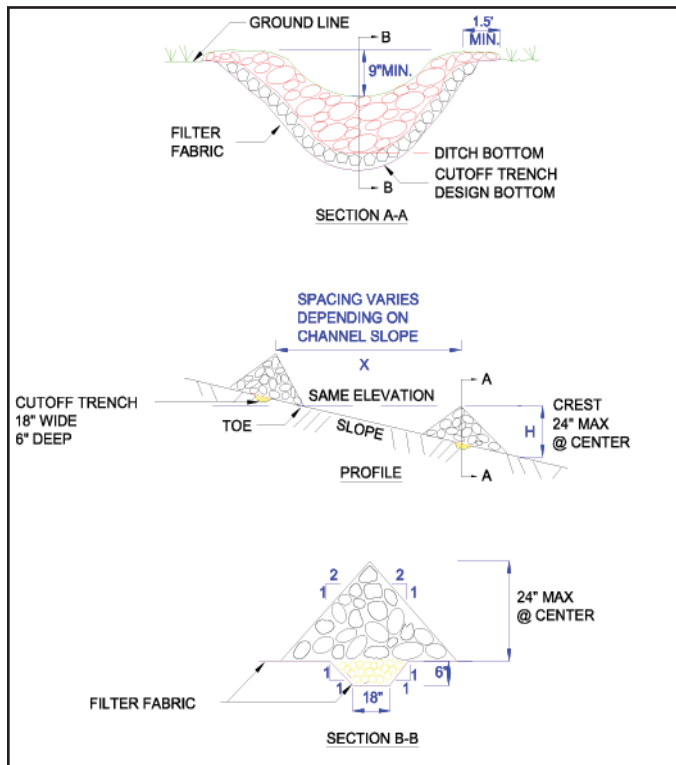

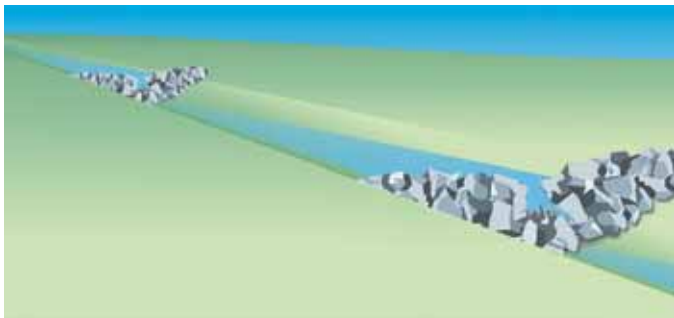

*Rock check dams must be installed before excavation or fill activities begin. See “How to install” for spacing directions.*



*Good installation of temporary rock check dams. The check dams should extend up the sides of the banks. Middle section should be lower than the sides. Clean out sediment as it accumulates. Remove check dams after site and channel are stabilized with vegetation.*





*Hay bales must not be used as check dams due to their high failure rates.*

## 7. Construct Permanent Controls

### Purpose:

Permanent stormwater treatment practices are constructed to maintain water quality, ensure groundwater flows, and prevent downstream flooding. Practices include detention ponds and wetlands, infiltration basins, and stormwater filters.

### Requirements:

If the total impervious\* area on your site, or within the common plan of development, will be 1 or more acres, you must apply for a State Stormwater Discharge Permit and construct permanent stormwater treatment practices on your site. These practices must be installed before the construction of any impervious surfaces.

### How to comply:

Contact the Vermont Stormwater Program and follow the requirements in the Vermont Stormwater Management Manual.

The Stormwater Management Manual is available at: [www.vtwaterquality.org/stormwater.htm](http://www.vtwaterquality.org/stormwater.htm)

\*An impervious surface is a manmade surface, including, but not limited to, paved and unpaved roads, parking areas, roofs, driveways, and walkways, from which precipitation runs off rather than infiltrates.



*This wet pond is designed to treat stormwater runoff, recharge groundwater, regulate the flow of water into nearby streams, and prevent downstream flooding.*



*Install all permanent stormwater treatment practices before constructing any impervious surfaces on site. This stormwater wetland treats stormwater runoff from the adjacent parking lot.*

## 8. Stabilize Exposed Soil

### Purpose:

Seeding and mulching, applying erosion control matting, and hydroseeding are all methods to stabilize exposed soil. Mulches and matting protect the soil surface while grass is establishing.

### Requirements:

All areas of disturbance must have temporary or permanent stabilization within 7, 14, or 21 days of initial disturbance, as stated in the project authorization. After this time, any disturbance in the area must be stabilized at the end of each work day.

The following exceptions apply:

- Stabilization is not required if earthwork is to continue in the area within the next 24 hours and there is no precipitation forecast for the next 24 hours.
- Stabilization is not required if the work is occurring in a self-contained excavation (i.e. no outlet) with a depth of 2 feet or greater (e.g. house foundation excavation, utility trenches).

All areas of disturbance must have permanent stabilization within 48 hours of reaching final grade (See page 33).

## How to comply:

Prepare bare soil for seeding by grading the top 3 to 6 inches of soil and removing any large rocks or debris.

### Seeding Rates for Temporary Stabilization

April 15 - Sept. 15 – Ryegrass (annual or perennial: 20 lbs/acre)

Sept. 15 - April 15 – Winter rye: 120 lbs/acre

### Seeding Rates for Final Stabilization:

Choose from:	Variety	lbs./acre	lbs./1000 sq.ft.
Birdsfoot trefoil	Empire/Pardee	5 <sup>1</sup>	0.10
or			
Common white clover	Common	8	0.20
plus			
Tall Fescue	KY-31/Rebel	10	0.25
plus			
Redtop	Common	2	0.05
or			
Ryegrass (perennial)	Pennfine/Linn	5	0.10

<sup>1</sup> - Mix 2.5 each of Empire and Pardee OR 2.5 lbs. of Birdsfoot and 2.5 lbs. white clover per acre.

### Mulching Rates

April 15 - Sept.15 – Hay or Straw: 1 inch deep (1-2 bales/1000 s.f.)

Sept.15 - April 15 – Hay or Straw: 2 in. deep (2-4 bales/1000 s.f.)

### Erosion Control Matting

As per manufacturer's instructions

### Hydroseed

As per manufacturer's instructions



*Excellent stabilization of large slopes to limit the area of disturbance. Make sure to install erosion control matting within 48 hours of grading to ensure good contact between soil and mat.*



*Good tracking up and down slope. Tracking slows down runoff and promotes infiltration. More mulch is needed.*



*Hydroseeding exposed soil is a good option for stabilizing large areas. Hydroseed is a mixture of seed, fertilizer, water and a tackifier to hold the seed in place before it germinates.*



*Excellent application of hay mulch. Good mulch cover and sediment barrier around soil stockpile.*

## 9. Winter Stabilization

### Purpose:

Managing construction sites to minimize erosion and prevent sediment loading of waters is a year-round challenge. In Vermont, this challenge becomes even greater during the late fall, winter, and early spring months.

'Winter construction' as discussed here, describes the period between October 15 and April 15, when erosion prevention and sediment control is significantly more difficult.

Rains in late fall, thaws throughout the winter, and spring melt and rains can produce significant flows over frozen and saturated ground, greatly increasing the potential for erosion.

### Requirements for Winter Shutdown:

For those projects that will complete earth disturbance activities prior to the winter period (October 15), the following requirements must be adhered to:

1. For areas to be stabilized by vegetation, seeding shall be completed no later than September 15 to ensure adequate growth and cover.
2. If seeding is not completed by September 15, additional non-vegetative protection must be used to





*Stabilization and seeding of slopes before winter will reduce or eliminate erosion in the spring. The grass on this slope is holding the soil in place and promoting infiltration of the melting snow.*

stabilize the site for the winter period. This includes use of Erosion Control Matting or netting of a heavy mulch layer. Seeding with winter rye is recommended to allow for early germination during wet spring conditions.

3. Where mulch is specified, apply roughly 2 inches with an 80-90% cover. Mulch should be tracked in or stabilized with netting in open areas vulnerable to wind.

## Requirements for Winter Construction

If construction activities involving earth disturbance continue past October 15 or begin before April 15, the following requirements must be adhered to:

1. Enlarged access points, stabilized to provide for snow stockpiling.
2. Limits of disturbance moved or replaced to reflect boundary of winter work.
3. A snow management plan prepared with adequate storage and control of meltwater, requiring cleared snow to be stored down slope of all areas of disturbance and out of stormwater treatment structures.
4. A minimum 25 foot buffer shall be maintained from perimeter controls such as silt fence.
5. In areas of disturbance that drain to a water body within 100 feet, two rows of silt fence must be installed along the contour.
6. Drainage structures must be kept open and free of snow and ice dams.

7. Silt fence and other practices requiring earth disturbance must be installed ahead of frozen ground.
8. Mulch used for temporary stabilization must be applied at double the standard rate, or a minimum of 3 inches with an 80-90% cover.
9. To ensure cover of disturbed soil in advance of a melt event, areas of disturbed soil must be stabilized at the end of each work day, with the following exceptions:
  - If no precipitation within 24 hours is forecast and work will resume in the same disturbed area within 24 hours, daily stabilization is not necessary.
  - Disturbed areas that collect and retain runoff, such as house foundations or open utility trenches.
10. Prior to stabilization, snow or ice must be removed to less than 1 inch thickness.
11. Use stone to stabilize areas such as the perimeter of buildings under construction or where construction vehicle traffic is anticipated. Stone paths should be 10–20 feet wide to accommodate vehicular traffic.

## 10. Stabilize Soil at Final Grade

### Purpose:

Stabilizing the site with seed and mulch or erosion control matting when it reaches final grade is the best way to prevent erosion while construction continues.

### Requirements:

Within 48 hours of final grading, the exposed soil must be seeded and mulched or covered with erosion control matting.



*Lawn is fully established before construction is completed at this home site.*

## How to comply:

Bring the site or sections of the site to final grade as soon as possible after construction is completed. This will reduce the need for additional sediment and erosion control measures and will reduce the total disturbed area.

For seeding and mulching rates, follow the specifications under Rule 8, “Stabilizing Exposed Soil”.



*Within 48 hours of final grading, erosion control matting and mulch have been applied.*



## **12. Dewatering Activities**

### **Purpose:**


Treat water pumped from dewatering activities so that it is clear when leaving the construction site.

### **Requirements:**

Water from dewatering activities that flows off of the construction site must be clear. Water must not be pumped into storm sewers, lakes, or wetlands unless the water is clear.

### **How to comply:**

Using sock filters or sediment filter bags on dewatering discharge hoses or pipes, discharge water into silt fence enclosures installed in vegetated areas away from waterways. Remove accumulated sediment after the water has dispersed and stabilize the area with seed and mulch.

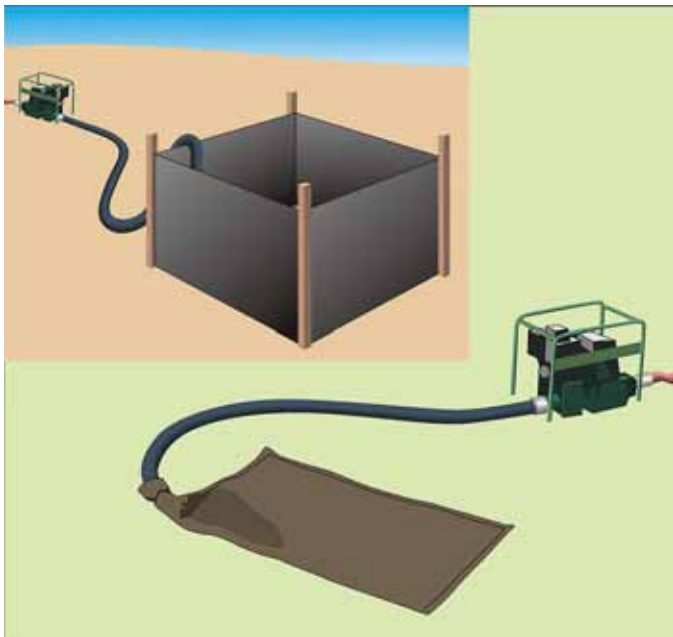

*Water is pumped from the construction site into a silt fence enclosure on a vegetated area or into a sock filter away from waterways.*

## 12. Inspect Your Site

### Purpose:

Perform site inspections to ensure that all sediment and erosion control practices are functioning properly. Regular inspections and maintenance of practices will help to reduce costs and protect water quality.

### Requirements:

Inspect the site at least once every 7 days and after every rainfall or snowmelt that results in a discharge from the site. Perform maintenance to ensure that practices are functioning according to the specifications outlined in this handbook.

In the event of a noticeable sediment discharge from the construction site, you must take immediate action to inspect and maintain existing erosion prevention and sediment control practices. **Any visibly discolored stormwater runoff to waters of the State must be reported.**

Forms for reporting discharges are available at:  
[www.vtwaterquality.org/stormwater.htm](http://www.vtwaterquality.org/stormwater.htm)

<b>Example Site Inspection Form</b>	<b>Y</b>	<b>N</b>
<b>1. Boundary Limits</b>		
• Site boundary markers are up and visible		
• Disturbance is only occurring within marked boundaries		
<b>2. Limit Disturbance Area</b>		
• Only the acreage listed on the <i>Authorization to Discharge</i> is disturbed at one time		
<b>3. Construction Entrance</b>		
• Off-site tracking of mud prevented		




<b>Example Site Inspection Form</b>		<b>Y</b>	<b>N</b>
<b>4. Sediment Barriers</b>			
• Silt fence is trenched into ground with no gaps			
• Accumulated sediment is less than ½ way up the fence			
<b>5. Diversion Berms</b>			
• All upland stormwater is diverted around the site			
<b>6. Check Dams</b>			
• Check dams are in place and stretch the width of the channel			
• Channels are stable with no erosion			
<b>8. Stabilize Exposed Soil</b>			
• Seed and mulch, and/or erosion control blankets are being used in accordance with the permit requirements			
<b>9. Winter Stabilization</b>			
• After September 15, all disturbed areas have been seeded and mulched to 3 inches deep, or covered in erosion control blankets.			
• For ongoing construction, exposed soil is mulched prior to forecasted rain events.			
<b>10. Stabilize Soil at Final Grade</b>			
• Within 48 hours of establishing final grade, soil is seeded and mulched or covered in erosion control matting			
<b>Water flowing off the site</b>			
• Water is free of sediment (water is clear)			

## Section 3

# Additional Resources

How to calculate slope:

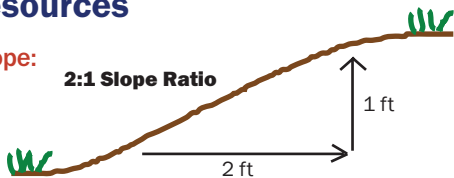

### Approximate Slope Conversions

Steepness	Percent	Slope ratio (ft/ft)	Degrees
Very steep	100%	1:1	45°
	50%	2:1	27°
Moderate	33%	3:1	18°
	25%	4:1	14°
Slight	10%	10:1	6°
	5%	20:1	3°

How to estimate disturbance area:

1 acre = 43,560 square feet = 4,840 square yards

### Area in acres (width in feet x length in feet)

(w) x (l)	100	150	200	300	400	500
100	0.2	0.3	0.5	0.7	0.9	1.1
150	0.3	0.5	0.7	1.0	1.4	1.7
200	0.5	0.7	0.9	1.4	1.8	2.3
300	0.7	1.0	1.4	2.1	2.8	3.4
400	0.9	1.4	1.8	2.8	3.7	4.6
500	1.1	1.7	2.3	3.4	4.6	5.7

## Acknowledgements

Design details and standards for sediment and erosion control practices have been adapted from the New York State Standards and Specifications for Erosion and Sediment Control. August 2005.

Photographs and illustrations provided by Tetra Tech, Kim Greenwood, Don Lake, Jim Pease, and Hydrograss Technologies.

This document has been adapted from the *Kentucky Erosion Prevention and Sediment Control Field Guide* produced by the Tetra Tech Water Resources Division in Fairfax VA for the Kentucky Division of Conservation and Division of Water. Inquiries regarding this publication should be directed to Barry Tinning, Tetra Tech, 1060 Eaton Place, Suite 340, Fairfax VA 22030 (703.385.6000).

Printing of this manual is sponsored by the Winooski Natural Resources Conservation District through a grant by the U.S. Environmental Protection Agency.



The Vermont Department of Environmental Conservation is an equal opportunity agency and offers all persons the benefits of participating in each of its programs and competing in all areas of employment regardless of race, color, religion, sex, national origin, age, disability, sexual preference, or other non-merit factors.

This document is available upon request in large print, Braille or audio cassette.

VT Relay Service for the Hearing Impaired  
1-800-253-0191 TDD>Voice - 1-800-253-0195 Voice>TDD

Vermont Department of Environmental Conservation  
Water Quality Division - Stormwater Section  
103 South Main Street, Building 10 North  
Waterbury, VT 05671-0408  
Tel: 802-241-3770 or 3777  
Fax: 802-241-3287

[www.vtwaterquality.org/stormwater.htm](http://www.vtwaterquality.org/stormwater.htm)